


EE. 5151: Communication Techniques

Aug 2019


Tutorial #1

KG / IITM

1. A low-pass signal of one-sided bandwidth of $W=1.25\text{MHz}$ is sent as a DSB-SC signal. If the receiver uses an IF sampling scheme, with center frequency $f_{\text{IF}} = 71\text{MHz}$, determine the least sampling rate required.
2. For the QCM signal with magnitude response as below, find the least possible band-pass sampling rate. Make a rough plot of the frequency response of the sampled sequence around 0Hz. Hint: Use both the band-edges (i.e., f_c+W and f_c-W in order to decide the “lowest” sampling rate).

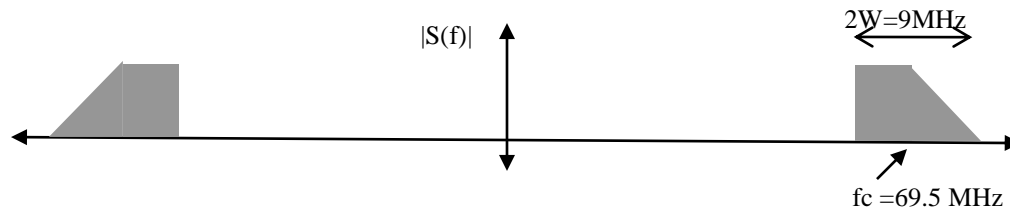

3. In the above problem, assume that the received signal has a phase offset of θ radians; in other words, $s(t) = m_1(t)\text{Cos}(2\pi f_c t + \theta) + m_2(t)\text{Sin}(2\pi f_c t + \theta)$. Now, what will be the time-domain representation of the sampled sequence? For the special case when $\theta = \pi/2$, what will be the samples of the received signal?
4. A QCM signal $s(t) = m_1(t)\text{Cos}(2\pi f_c t) + m_2(t)\text{Sin}(2\pi f_c t)$ has the two message signals $m_1(t)$ and $m_2(t)$ of one-sided bandwidth of $W_1=3\text{KHz}$ and $W_2=4\text{KHz}$, respectively, and take $f_c=31\text{KHz}$.
 - (a) Find the minimum band-pass sampling rate $f_s=1/T_s$ that gives un-aliased samples of the two signals.
 - (b) Assuming that the spectrum of $m_1(t)$ has a “triangular” shape between -3KHz to $+3\text{KHz}$, make a labeled, rough sketch of the spectrum of the samples $m_1(kT_s)$ between -40KHz and $+40\text{KHz}$.
5. A dozen DSB-SC signals of one-sided (low-pass) bandwidth $W = 4\text{MHz}$ (including a “guard-band of 0.5MHz) are present between 800MHz and 896MHz , as shown below. Describe the operations (sampling, rate-conversion, filtering) that you need to do to recover Nyquist rate samples of the 7th DSB-SC signal (i.e., the signal present between 848MHz and 856MHz).

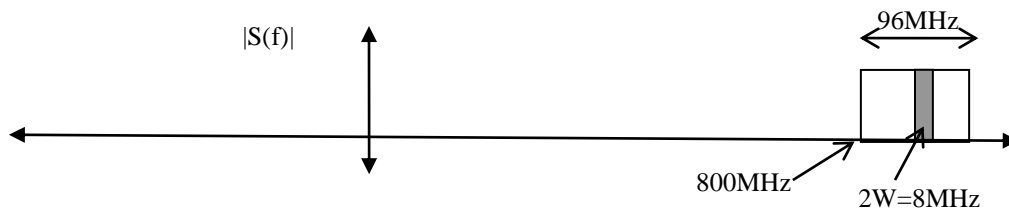

6. In the question above, if the dozen signals were QCM, how does your answer change?